

AGRICULTURAL & FORESTRY EQUIPMENT



GRAVEL
DISTRIBUTION

- BERTI** Junkkari
- AGRO TREND**
- TAJFUN**
- COUNTRY**
- INDUSTRIES Renaud Gravel**



BERTI®

MULTIFUNCTION OFFSET & IN-LINE MULCHERS



TA/PS

POWER (HP): 90-200
WORKING WIDTH (CM): 180-250
WEIGHT (KG): 1015-1345
CUTTING Ø (MAX., CM): 10
RANGE OF MOTION: - 65° à + 90°



TA/S

POWER (HP): 60-110
WORKING WIDTH (CM): 160-220
WEIGHT (KG): 810-1055
CUTTING Ø (MAX., CM): 7-8
RANGE OF MOTION: - 65° à + 90°



TA/M

POWER (HP): 50-90
WORKING WIDTH (CM): 145-200
WEIGHT (KG): 610-830
CUTTING Ø (MAX., CM): 4-5
RANGE OF MOTION: - 65° à + 90°



TA/K

POWER (HP): 25-50
WORKING WIDTH (CM): 115-145
WEIGHT (kg): 300-375
CUTTING Ø (MAX., CM): 2
RANGE OF MOTION: - 65° à + 90°



TA/MF (front model)

POWER (HP): 60-160
WORKING WIDTH (CM): 160-220
WEIGHT (KG): 1050-1570
CUTTING Ø (MAX., CM): 4-5
RANGE OF MOTION: - 65° à + 90°



TOP-QUALITY COMPONENTS



MANNESMANN



www.indgravel.com

HYDRAULIC HEDGE MOWER



FB/T 660 - 730

POWER (HP): 100-150
 WORKING WIDTH (CM): 120
 WEIGHT (KG): 550-780
 CUTTING Ø (MAX., CM): 5 standard heads*

FB/P 500

POWER (HP): 70-140
 WORKING WIDTH (CM): 100
 WEIGHT (KG): 480-550
 CUTTING Ø (MAX., CM): 5 standard heads*

*Cutting dimensions may vary with optional heads.

WEED MOWER & INTER-ROW WEEDER AND MULCHER



ECOSPRINT

- Cable weeding between rows
- For cleaning under & in between trees in orchards and vineyards
- Cleaning, disbudding and thinning vines
- Independent hydraulic power unit
- Double pump
- Bio 46 oil tank
- Tractor-side control unit
- Joystick or cable control
- Cat. I and II self-supporting three-point linkage
- Hydraulic adjustment of working angle, height and width



EKR/S

- Front and rear model mulcher with a reversible frame.
- Perfect for bushes, set-aside land, cover crops and undergrowth.

Mulcher to fit front tractor's linkage or reverse-drive tractors, from 50 to 130 HP. Suited to mulch grass, bushes, scrubs and prunings up to Ø 4-5 cm., it is ideal for general clearing of open fields, set aside purposes, and in vineyards



More models available for our custom orders programs.

AGRICULTURAL MULCHER FOR COVER CROPPING



LAND/P

POWER (HP):

LAND/P400: 100-150

LAND/P500: 140-300

LAND/P600: 180-300

WORKING WIDTH (CM): 400-600

WEIGHT (KG): 2530-4070

MULCH: Corn, potatoes and cover crops.



Wide-width shredder



B-WING

POWER (HP): 250-350

WORKING WIDTH (CM): 2x280 ou 2x300

TOTAL WIDTH WITH FRONT MOWER (CM): 880

CUTTING Ø (MAX., CM): 6

FORESTRY MULCHER



MULCHING HEAD FOR EXCAVATORS FROM 2.5 T 35 T

ADVANTAGES OF A FORESTRY MULCHER ON AN EXCAVATOR OR SKID-STEER

Using a forestry mulcher on an excavator allows efficient surface processing, reducing working time and operating costs.

Thanks to its ability to access hard-to-reach areas and work on varied terrain, a forestry mulcher mounted on an excavator is ideal for various types of forestry and land management work.

Operating a forestry mulcher from the safe cab of an excavator offers greater protection for the operator, reducing the risk of accidents and improving working conditions.

Mulching capacity from 3 cm to 40 cm diameter.

Hydraulic mulching head and Forestry mulcher for excavators, skid-steer loaders and loaders for personal, semi-professional and professional use!

NOTE: Contact your local expert advisor to determine the size and type of mulcher best suited to your machinery.



KX

POWER (HP): 60-110

WORKING WIDTH (CM): 150-190

WEIGHT (KG): 690-970

CUTTING Ø (MAX., CM): 15

FORESTRY LOGGING WINCHES



SPECIAL FEATURES FOR ALL WINCHES:

- Cab guard
- Chainsaw support
- Ball-turner support
- Lower pulley
- Trailer hitch
- PTO
- Cable with main line, two chain sliders, and two chain chokers
- Storage boxes (except Tajfun 35A)
- Band brake

STEEL CABLE AND WINCH ACCESSORIES



More details on pages 7, 8 and 9.

EGV 35 A

PULLING POWER: 7 700 lbs (3 493 kg)
CABLE LENGTH: Ø 9 mm x 50 m
REQUIRED TRACTOR CAPACITY: 11–25 kW (15–35 hp)

EGV 45 A

PULLING POWER: 9 900 lbs (4 490 kg)
CABLE LENGTH: Ø 10 mm x 60 m
REQUIRED TRACTOR CAPACITY: 15–37 kW (20–50 hp)

EGV 55 A

PULLING POWER: 12 100 lbs (5 489 kg)
CABLE LENGTH: Ø 11 mm x 70 m
REQUIRED TRACTOR CAPACITY: 25–52 kW (35–70 hp)

EGV 65 A

PULLING POWER: 14 500 lbs (6 577 kg)
CABLE LENGTH: Ø 12 mm x 80 m
REQUIRED TRACTOR CAPACITY: 37–66 kW (50–90 hp)

EGV 85 A

PULLING POWER: 18 900 lbs (8 573 kg)
CABLE LENGTH: Ø 13 mm x 90 m
REQUIRED TRACTOR CAPACITY: 52–100 kW (70–135 hp)




Several other models available. Contact us!



REMOTE-CONTROLLED WINCH FOR TRACTOR, SKID STEER LOADER AND OTHER FORESTRY EQUIPMENT

SPECIAL FEATURES FOR ALL REMOTE-CONTROLLED MECHANICAL FORESTRY WINCHES:

- Cab guard
- Chainsaw support,
- Log turner support
- Lower pulley
- Trailer hitch
- PTO
- Cable with main line, two chain sliders and two slings.
- 2 remote controls included: wired and wireless

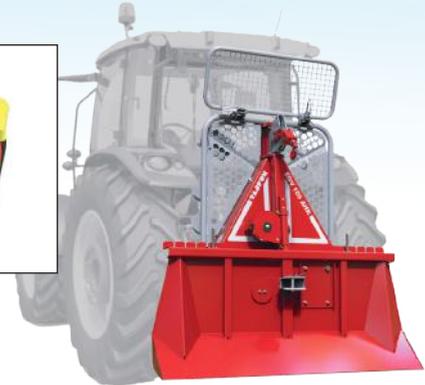

EGV 45 AHK

PULLING TRACTION: 9 900 lbs (4 490 kg)
 CABLE LENGTH: Ø 10 mm x 60 m
 REQUIRED TRACTOR CAPACITY: 15–37 kW (20–50 hp)

EGV 55 AHK

PULLING TRACTION: 12 100 lbs (5 489 kg)
 CABLE LENGTH: Ø 11 mm x 70 m
 REQUIRED TRACTOR CAPACITY: 25–52 kW (35–70 hp)

EGV 65 AHK

PULLING TRACTION: 14 500 lbs (6 577 kg)
 CABLE LENGTH: Ø 12 mm x 80 m
 REQUIRED TRACTOR CAPACITY: 37–66 kW (50–90 hp)

Several other models available. Contact us!



LARGE AND MASSIVE DRUM (large capacity of the rope)

ADVANTAGEOUS TECHNICAL FEATURES

- **A large drum diameter** : reduces friction and extends the lifespan of components.
- **Strong drum walls** : Designed to withstand heavy-duty work.
- **Wide brake band** : improved heat dissipation and increased performance.
- **High-quality SKF bearing** : superior reliability and extended durability.
- **Brake band with 25% additional capacity**, proportional to the winch's pulling force.
- **High pulling force and lower loading of component parts** due to a 3 or 5 plate clutch.
- **Thick strengthened drive chain SKF** : optimized efficiency and longevity.



WINCH ACCESSORIES

Wire rope

Wire rope compatibility with particular winch models and maximum wire rope lengths are quoted in the technical data table, next to particular winch description.

Article number	Description	Diameter	Weight	Breaking Force
503453	6 S-V	Ø 9 mm / Ø 0.35"	0.453 kg/m / 0.99 lbs/Ft	92,05 kN / 20,694 lbs
503454	6 S-V	Ø 10 mm / Ø 0.40"	0.543 kg/m / 1.19 lbs/Ft	111,47 kN / 25,059 lbs
503446	6 F-V	Ø 11 mm / Ø 0.43"	0.655 kg/m / 1.44 lbs/Ft	133,28 kN / 29,962 lbs
503447	6 F-V	Ø 12 mm / Ø 0.47"	0.764 kg/m / 1.68 lbs/Ft	152,79 kN / 34,348 lbs
503448	6 F-V	Ø 13 mm / Ø 0.50"	0.881 kg/m / 1.94 lbs/Ft	180,00 kN / 40,465 lbs
503449	6 F-V	Ø 14 mm / Ø 0.55"	1.01 kg/m / 2.23 lbs/Ft	210,00 kN / 47,210 lbs
503450	6 F-V	Ø 16 mm / Ø 0.63"	1.290 kg/m / 2.78 lbs/Ft	238,98 kN / 52,650 lbs

ADDITIONAL ELEMENTS FOR WIRE ROPE

Hooks

Article number	Description	Wire Rope Diameter
500079	Slider hook	Ø 9–Ø 13 mm / Ø 0.35"–Ø 0.50"
500070	Parallel hook P7-8	Ø 9 mm / Ø 0.35"
500071	Parallel hook P10	Ø 10–Ø 13 mm / Ø 0.40"–Ø 0.50"
500072	Parallel hook P13	Ø 14 mm / Ø 0.55"



Ball Joint

Article number	Description	Wire Rope Diameter
504398	Pivoting Ball Joint - for chain lock	Ø 8–Ø 10 mm / Ø 0.31"–Ø 0.50"
504399	Pivoting Ball Joint - for chain lock	Ø 10–Ø 13 mm / Ø 0.40"–Ø 0.50"





WINCH ACCESSORIES (CONTINUED)

ADDITIONAL ELEMENTS FOR WIRE ROPE (continued)

Sliders simple and rotating

Article number	Description	Wire Rope Diameter
500090	Slider with chain lockPOK	Ø 13 mm – / Ø 0.50" –
500089	Rotating slider with chain lock D7-8	–Ø 12 mm / –Ø 0.47"
504155	Rotating slider with link and chain lock D7-8	–Ø 12 mm / –Ø 0.47"



OTHER WINCH ACCESSORIES

Fuel container holder

The fuel container holder can be installed on the left or right side of the safety net.


Support	Weight	Width X Length
FUEL CONTAINER HOLDER	3.6 kg / 8.0 lbs	155–188 x 343 mm 6"–7.4" x 13.5"
FUEL CONTAINER HOLDER XL	3.8 kg / 8.0 lbs	155–188 x 383 mm 6"–7.4" x 15"



Chainsaw holder


Can be installed on the left or right side of the safety net.
One winch can hold up to two holders.

Support	Weight
CHAINSAW HOLDER	1.36 kg / 3.0 lbs

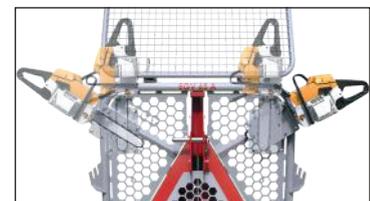

Chain holder

Support	Weight	Width X Length
CHAIN HOLDER	1,2 kg / 2,65 lbs	67 x 138 x 80 mm 2.6" x 5.4" x 3.1"



WINCH ACCESSORIES (CONTINUED)



Tajfun P.T.O. shafts

- Easy to use, user friendly C Line connection.
- Flexible protection hood, which allows easy access to connecting mechanism and grease nipples Tajfun P.T.O. Shaft.

Shafts	Dimensions
P.T.O. SHAFT TAJFUN C LINE-T 2BR+ KK560	1 3/8"Z6 - 1 3/8" Z6; L _{KK} = 560*
P.T.O. SHAFT TAJFUN C LINE-T 4BR+ KK560	1 3/8"Z6 - 1 3/8" Z6; L _{KK} = 560
P.T.O. SHAFT TAJFUN C LINE-T 6BR+ KK560	1 3/8"Z6 - 1 3/8" Z6; L _{KK} = 560



*L_{KK} - P.T.O. Shaft length between pivot points (mm), in compressed position rounded to 10 mm / 0.4".

SKID STEER ADAPTER EGV SAE J2513

For mounting Tajfun Logging Winches on Skid-steer and Compact Track Loaders

Introducing the versatile Skid Steer Adapter designed to seamlessly integrate Tajfun winches (EGV 45 A/AHK, EGV 55 A/AHK, EGV 65 A/AHK and EGV 85 A/AHK) with a range of machinery, such as Skid-steers and Compact Track Loaders. This adapter is specifically engineered to meet the stringent requirements of the SAE J2513 standard, making it compatible with leading brands such

as Bobcat, CAT, Kubota, and JCB and others. To optimize the functionality and performance of winches on these machines, we recommend the use of additional equipment listed in the table below. This innovative solution ensures a secure and efficient connection, enhancing the operational capabilities of your machinery with the trusted quality of Tajfun winches.



Article number	Recommended Additional Equipment
252483	Hydro Power Unit HP 25 EGV 45 + 55
248124	Hydro Power Unit HP 25 EGV 65
255088	Hydro Power Unit HP 30 EGV 85
263493	Set of hydraulic connections ISO16028
517695	Mechanical brake lever CAT 2 M27X3 350-550

Specifications	Skid Steer Adapter EGV SAE J2513
HEIGHT	602 mm / 24"
LENGTH	1147 mm / 45"
WIDTH	417 mm / 16.5"
WEIGHT	64 kg / 141 lbs

FIREWOOD PROCESSOR



RCA 400 JOY

MAXIMUM DIAMETER OF LOG: 2-16 in (5-40 cm)
 CUT LOG LENGTH - PIVOTING CONVEYOR: 10-20 in (25-50 cm)
 LENGTH OF DISCHARGE CONVEYOR (SWIVEL): 16 ft (5 m)

Joystick & hydraulic control of table and accessories.
 Cutting chain speed (12,000 rpm)

RCA 480 JOY

MAXIMUM DIAMETER OF LOG: 2-19 in (5-48 cm)
 CUT LOG LENGTH - PIVOTING CONVEYOR: 10-20 in (25-50 cm)
 LENGTH OF DISCHARGE CONVEYOR (SWIVEL): 16 ft (5 m)

RCA 400 JOY: 15 ton cylinder - 2 stages
RCA 480 JOY: 25 ton cylinder - 2 stages



Several other models available. Contact us!

RCA 500 JOY

MAXIMUM DIAMETER OF LOG: 2-20 in (5-50 cm)
 CUT LOG LENGTH: 10-20 in (25-50 cm)
 LENGTH OF DISCHARGE CONVEYOR (SWIVEL): 16 ft (5 m)

FIREWOOD ACCESSORIES



Splitting Wedges

Whether working with soft or hardwood, HARDOX® wedges provide exceptional strength and durability. Available in 2, 4, 6, 8, 12, or 16-way configurations.



External Drive Units

- Hydro Power Unit : **HP25 and HP30**
- Gasoline: GP35 (fixed or mobile)
- Electric : EP20



Log Loaders

- DM 1511
- DM 2000



Sawdust Extractor Fans

- XE10 and XE11 Models



Heavy-duty Feed Live Deck

- RN 2000 – Fixed or mobile model
- RN 5000 – Fixed or mobile model



Sawdust Separator

- Model SP11 – Effectively separates impurities and wood chips.



Heavy Duty Shafts





TAJFUN

HYDRAULIC TRACTOR CRANE



DOT 40 K

MAX. REACH: 23 ft (7 100 mm)

TELESCOPIC BOOM LENGTH: 6 ft (1 800 mm)

NET LIFTING TORQUE: (41 kNm)

CHARGING CAPACITY: 11 000 lbs (5 000 kg)

TRAILER DIMENSIONS: 180 x 80 in (4 535 mm x 2 017 mm)

SLEWING ANGLE: 390°



Truck crane models available on order. Contact us!



WOODCHIPPER



Specifications	HJ172G	HJ252G
FEED OPENING SIZE	20 cm x 20 cm	26 cm x 26 cm
DIAMETER	74 cm	94 cm
BLADE DISC MASS	106 kg	172 kg
NUMBER OF BLADES, pc*	4	4
REVOLUTIONS	540-1000 r/min	540-1000 r/min
BLADE SETTING	3-20 mm	3-20 mm
MAX. LOG DIAMETER	17 cm	25 cm
CHIPPING CAPACITY	4-8 m ³ /h	7-30 m ³ /h
POWER REQUIREMENT**	40-70 cv	70 cv +
WEIGHT	672 kg	825 kg

SPARE BLADES

D56340141
Fits HJ172 chipper.
Requires 4 pieces for the chipper:
7 3/4 x 4 x 1/2 in
(200 x 100 x 10mm).



D56133172
Fits HJ252 models.
Blade dimensions:
11 x 4 x 1/2 in
(280 x 100 x 10mm).
Holes for mounting bolts are oval.
Requires 4 pieces/cart



Several other models available. Contact us!



FORESTRY CRANE



SMART SERIES


Lightweight and durable SMART series cranes designed for small tractors and ATVs. Their light weight spares ground and vegetation.

410 SMART

- MAX REACH 13.5 ft (4.1 m)
- LIFTING CAPACITY 11 ft (3.3 m): 683 lbs (310 kg)
- LIFTING CAPACITY: 926 lbs (420 kg)
- GRAPPLE AREA: 0.86 ft² (0.08 m²)
- WORKING PRESSURE (BAR): 175
- WEIGHT: 375 lbs (170 kg)
- TURNING RADIUS OF CRANE: 360°
- CONTROL VALVE: 5/7XY
- ROTATOR MAX. LOAD (kN): 10
- ROTATORS TURNING RADIUS : unlimited

500 SMART

- MAX REACH: 16.5 ft (5.0 m)
- LIFTING TORQUE GROSS (kNm): 23
- LIFTING CAPACITY AT 11.5 ft (3.5 m): 1212.5 lbs (550 kg)
- LIFTING CAPACITY AT FULL REACH: 842 lbs (382 kg)
- SLEWING TORQUE (kNm): 6.3
- SLEWING CYLINDERS (PCS): 4
- SLEWING ANGLE: 370°
- ROTATOR MAX AXIAL LOAD (kN): 30
- TELESCOPIC BOOM STROKE LENGTH: 3.6 ft (1.1 m)

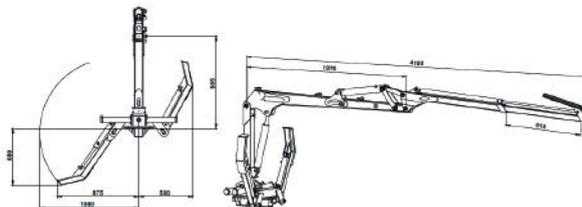

FORESTRY CRANE



MASTER SERIES

The MASTER series is designed for forest landowners and farmers. This affordable, efficient, and durable forestry crane can be used for a wide range of tasks around farms and woodlots.





SNOWBLOWER



Specifications	1000 SERIE 1048	2000 SERIE 2060	3000 SERIE 3084	4000 SERIE 4096
HP min.	12	20	40	85
HP max	20	35	75	135
CUTTING WIDTH (in)	48	60	84	96
CUTTING HEIGHT (in)	24	26	30	38
UNIT WEIGHT (lbs)	370	520	815	1610
FAN DIAMETER (in)	20	24	26	30
FAN WIDTH (in)	6	7	8	12
NUMBER OF FAN BLADES	4	4	4	5
FAN SHAFT OD (in)	1	1 1/4	1 1/2	2
AUGER DIAMETER (in)	13	13	17	17
AUGER SHAFT (in)	1	1 7/16	1 7/16	1 7/16
AUGER CHAIN	#50	#60	#60H	#80
CHUTE LENGTH (in)	38	44	48	50



Specifications subject to change without notice.

<p>Hydraulic deflector cylinder</p> 	<p>Mechanical turner</p> 	<p>Hydraulic turner</p> 	<p>Adjustable skid shoe</p> 	<p>Adjustable poly skid shoe</p> 	<p>Electric turner</p> 
---	--	---	---	---	--

Several other models available. Contact us!



BEDDING SPREADER (WOOD SHAVINGS) FOR POULTRY FARM



DR-52

- Width 58 in.
- Adjustable height
- Constant spreading by mechanical drive / PTO
- Quick Attach for Kubota GF1800 (included)
- Custom quick coupler:
 - **Ventrac** or **Steiner** compatible couplers available upon request..
 - Custom models can also be manufactured to your specific requirements.
 - Required tractor: model equipped with a **front coupler** and **front P.T.O.** (e.g., John Deere X739).



Straw-designed units coming soon.

NEW



ABRASIVE SPREADER



EP-96

- **ROBUST CONSTRUCTION:** 11-gauge steel bucket with removable sieve grid.
- **EFFICIENT CONVEYOR:** 13" self-cleaning chain conveyor
- **HYDRAULIC ACCURACY:** Hydraulic motor-assisted spreading with independent flow control for conveyor and turnstile.
- **SOLID CHASSIS:** Body mounted on a tubular chassis with tandem suspension and axles weighing 3500 lbs each.
- **SAFETY AND DURABILITY:** 8000-lbs. hydraulic brake, regulation lighting, rotating beacon, Galvanized treated steel or Anti-corrosion treatment with customizable urethane paint.
- **OPTIONAL MOTORIZATION :** Gas Engine



HYDRAULIC FORESTRY WINCH



Specifications	RG-34	RG-48
PULLING CAPACITY (EMPTY DRUM)	15 000 lbs (6 700 kg)	20 000 lbs (8 900 kg)
PULLING CAPACITY (FULL DRUM)	5 137 lbs (2 330 kg)	6 753 lbs (3 063 kg)
RECOMMENDED PUMP FLOW	15 to 20 gpm 68 to 90 lpm	20 to 30 gpm 90 to 136 lpm
SPEED (EMPTY DRUM)	31 ft/min (9 m/min.)	34 ft/min (10 m/min.)
SPEED (FULL DRUM)	92 ft/min (28 m/min.)	76 ft/min (23 m/min.)
CABLE (1) CHOKER (2)	3/8 x 150 ft * 3/8 x 5TCC	7/16 x 150 ft * 7/16 x 6T3C
WEIGHT	550 lbs (250 kg)	950 lbs (432 kg)
WIDTH	50 in	60 in
HEIGHT	60 in	80 in



RG-34



RG-48

Calculations are theoretical and based on a pressure of 3,000 PSI.

* All cables are button-pressed.

OPTIONAL EQUIPMENT: External control kit / Wireless remote control kit.

CHAINSAW BENCH



RG-15

Comes with bolts and bracket for chainsaw
Adjustable cutting length
Dismountable and portable



LOG SPLITTER



Specifications	FGRM 24"
ENGINE	Briggs and Stratton Vanguard® 10.0 HP 305cc
CYLINDER	34 000 lbs splitting force
RUNNING TIME	8 seconds
LARGE WORKING TABLE	30 in x 44 in
OIL TANK	26 gallons (100 liters)
TIRES	5.30 x 12 5 lug rim
WEIGHT	530 lbs (240 kg)




ACCESSORIES



Chain type chocker TCC
To be used with H-12



Chain chocker 5/16 x 6 TCA-HD.
To be used with RG6221



Chocker type 3 T3C.
To be used with H-632



Main line ring H-12.
Use with chain type chocker TCC



Slider hook RG6221.
Use with chain chocker 1/4 x 6 TCA-HD



Main chocker type 3 H-632.
Use with chocker type 3 T3C



Cant hook 30" or 42"



Cant dog 42"



Deviation pulley RG-DEV



Suprem braided nylon rope



Lift hook with interchangeable tip



Log clam 16" to 20"



Skidding cone



Firewood Big Bag



Hydraulic Winch Head



Nylon chocker 4" x 72" RG2904SN46

Nylon chocker 4" x 84" RG2904SN47

EQUIPMENT | SERVICE | EXPERTISE



*Beyond the machines, there is service.
Beyond service, there is expertise.*

DESIGN / MANUFACTURING / REPAIR / DISTRIBUTION

MACHINING

- Custom fabrication
- Cylinder repair
- Shaft and bushing reconditioning (“pins” and “bushings”)
- CNC: small-batch manufacturing available

WELDING

- Steel / Aluminum
- Stainless Steel / Cast Iron
- TIG / MIG

METAL PREPARATION

- High-definition plasma cutting
- High-capacity digital press brake
- Versatile cutting and preparation services

HYDRAULICS

- Hoses / Components
- Cylinders / Pumps / Valves
- Design / Distribution
- Manufacturing / Repair

CONSTRUCTION EQUIPMENT REPAIR:

Excavators, loaders, compactors, feller-bunchers, service trucks, and more.



Supplier of parts and components for trailers, as well as for all types of forestry and agricultural machinery.

Rotators, log grapples, chainsaw oil, firewood bags, axles, hitch parts, tie-down and ratchet straps, excavator bucket teeth... and much more.



OFFICIAL SUPPLIER OF HYDRAULIC COMPONENTS

- Hydraulic hoses and fittings
- Hydraulic tubes and tube fittings
- Industrial hoses
- Belts



Many other models available.
Contact us!

From coast to coast,
we cover the entire Canadian territory.

DEALER | AUTHORIZED PARTNER

Visit www.indgravel.com to find a
partner dealer near you.



GRAVEL

DISTRIBUTION

THE TRUSTED REFERENCE Since 1968 -
For over 58 years, providing the best advice,
products, and services to meet your needs.

info@indgravel.com | **1 833 889-2794**

Follow us on social media and events:

